


Product	Bore Dia (d) (mm)	Outer Dia (D) (mm)	Width (B) (mm)	Radius (min) (rs) (mm)	Dynamic Load Rating (Cr) (N)	Static Load Rating (Cor) (N)
6000	10	26	8	0.3	4,550	1,950
6001	12	28	8	0.3	5,100	2,400
6002	15	32	9	0.3	5,600	2,850
6003	17	35	10	0.3	6,000	3,250
6004	20	42	12	0.6	9,400	5,050
6005	25	47	12	0.6	10,100	5,850
6006	30	55	13	1	13,200	8,250
6007	35	62	14	1	15,900	10,300
6008	40	68	15	1	16,700	11,500
6009	45	75	16	1	21,000	15,100
6010	50	80	16	1	21,800	16,600
6011	55	90	18	1.1	28,300	21,200
6012	60	95	18	1.1	29,400	23,200
6013	65	100	18	1.1	30,500	25,200
6014	70	110	20	1.1	38,100	30,900
6015	75	115	20	1.1	39,600	33,500
6200	10	30	9	0.6	5,100	2,400
6201	12	32	10	0.6	6,800	3,050
6202	15	35	11	0.6	7,650	3,750
6203	17	40	12	0.6	9,550	4,800
6204	20	47	14	1	12,800	6,650
6205	25	52	15	1	14,000	7,850
6206	30	62	16	1	19,500	11,300
6207	35	72	17	1.1	25,700	15,400
6208	40	80	18	1.1	29,100	17,800
6209	45	85	19	1.1	32,700	20,300
6210	50	90	20	1.1	35,100	23,300

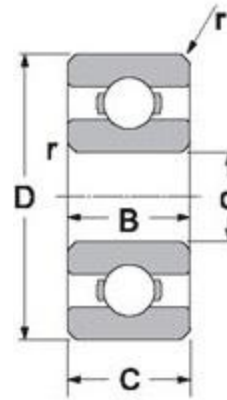

6211	55	100	21	1.5	43,400	29,400
6212	60	110	22	1.5	52,400	36,200
6213	65	120	23	1.5	57,200	40,100
6214	70	125	24	1.5	62,200	44,100
6215	75	130	25	1.5	67,400	48,300
6300	10	35	11	0.6	8,100	3,450
6301	12	37	12	1	9,700	4,200
6302	15	42	13	1	11,400	5,450
6303	17	47	14	1	13,600	6,650
6304	20	52	15	1.1	15,900	7,850
6305	25	62	17	1.1	20,600	11,300
6306	30	72	19	1.1	26,700	15,000
6307	35	80	21	1.5	33,400	19,300
6308	40	90	23	1.5	40,700	24,000
6309	45	100	25	1.5	53,000	32,000
6310	50	110	27	2	62,000	38,300
6311	55	120	29	2	71,600	45,000
6312	60	130	31	2.1	81,900	52,200
6313	65	140	33	2.1	92,700	59,900
6314	70	150	35	2.1	104,000	68,200
6315	75	160	37	2.1	113,000	77,200